


20'-0" H.U.B.

REINFORCING RODS:
5/8"φ ON TOP, 3/4"φ ON BOTTOM,
LOCATED 12" ON CENTER

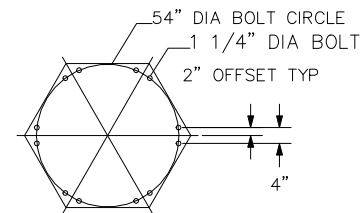

12 BOLT
BASE BOLT PATTERN
1 1/4" BASE PLATE THICKNESS AT ANCHOR BOLT
VIEW A-A
NOT TO SCALE

CREATED BY: HOOSIER CRANE SERVICE

CONFIDENTIAL

GORBEL

600 FISHERS RUN
P.O. BOX 593
FISHERS, NY 14453-0593

MODEL NO.: FS300-24-W24

CAPACITY: 5.000 TON
SPAN: 16'-0"
H.U.B.: 20'-0"

QUANTITY: 1
SHIPPING WT.: 5746 LBS

DRAWN: lauyod

DATE: DEC 30, 2014

C.O.#: test

P/N: test.1A

NOTES:

- 1) JIB CRANE FOUNDATION REQUIREMENTS ARE BASED ON A SOIL PRESSURE OF 2500 LBS PER SQUARE FOOT. CONCRETE RECOMMENDED FOR JIB CRANE FOUNDATION IS 3000 LBS PER SQUARE INCH OF COMPRESSIVE FORCE.
- 2) DO NOT SCALE FROM THIS DRAWING.
- 3) OVERALL HEIGHT = 22'-0 1/8"